




49" Indoor Floor-Standing Kiosk

-Built in Android System



24/7 Support 24/7 Operation

 Timer On/Off

 LED backlight
Energy-saving

Easy Easy installation

Industrial Metal Frame
Housing

Wide Viewing Angle

FHD High Definition

Smart Thermal
Management



DESCRIPTION

NFS49A-E is a product designed to be used in an indoor environment. The unit offers reliable 24/7 operation, full HD(1080P) resolution, built in Android system, toughened glass and Apple style metal housing. It can be used in retail stores, shopping malls, schools, hospitals, banks, airports, metro stations, and other places that require digital signage solution.

PRODUCT OVERVIEW

- Full High Definition (1080p)** Ability to display applications in different resolution options.
- Support 24/7 operation** Long-life panel has high reliability and stability to ensure the system runs continuously during operation.
- Time On/Off** Auto power On/Off setting allows to make display schedules and extends the system life time.
- Built in Android System** Android system, 2GB/4GB memory, 8GB-32GB storage, HDMI / VGA / RJ45 / USB2.0 and wireless connectivity



Built in Cooling Fans

The fans will work only when the system is up to the given temperature and requires cooling. This function ensures digital signage runs 24/7 operation without any damage to the screen.



Multi-user Interactivity - Optional

Multi-user 10-touch surface simultaneous touch interactivity



2 Year Warranty


NTRON warranties this product to be free from defects in material or workmanship for a period of two (2) years following the date of purchase, provided the product is used in an indoor environment.



TECHNICAL SPECIFICATIONS

| | |
|-------------------------------------|---|
| Model No | NFS49A-E |
| Screen Size / Touch | 49inch / Optional |
| Unit Size(mm) | 710(h)x1810(v)x50(d) |
| Display Size(mm) | 605(h) x1074(v) |
| Resolution | 1920x1080 |
| Brightness(cd/m²) | 300 cd/m ² max |
| Color | 16.7M |
| Contrast Ratio | 1200:1 typ. |
| Input Power Voltage | AC100~240V (50Hz~60Hz) |
| Working Temperature | 0° ~ 45° |
| Input Ports | VGA, HDMI, RJ45, USB2.0 |
| Response Time | 8ms |
| Lifespan | 40000h |
| Accessories | Power cable, HDMI cable, Remote control |
| Gross Weight / Net Weight | 70KG / 65KG |

PHYSICAL DIMENSIONS

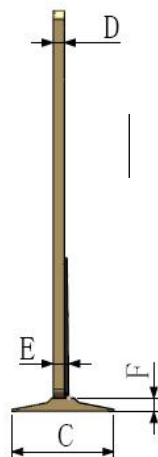

- A: 1810mm
- B: 710mm
- C: 450mm
- D: 50mm
- E: 70mm
- F: 60mm
- G: 1074mm
- H: 605mm
- I: R38mm

Note: All measurements in millimeters (mm)