




LED Flexible Transparent Film Display

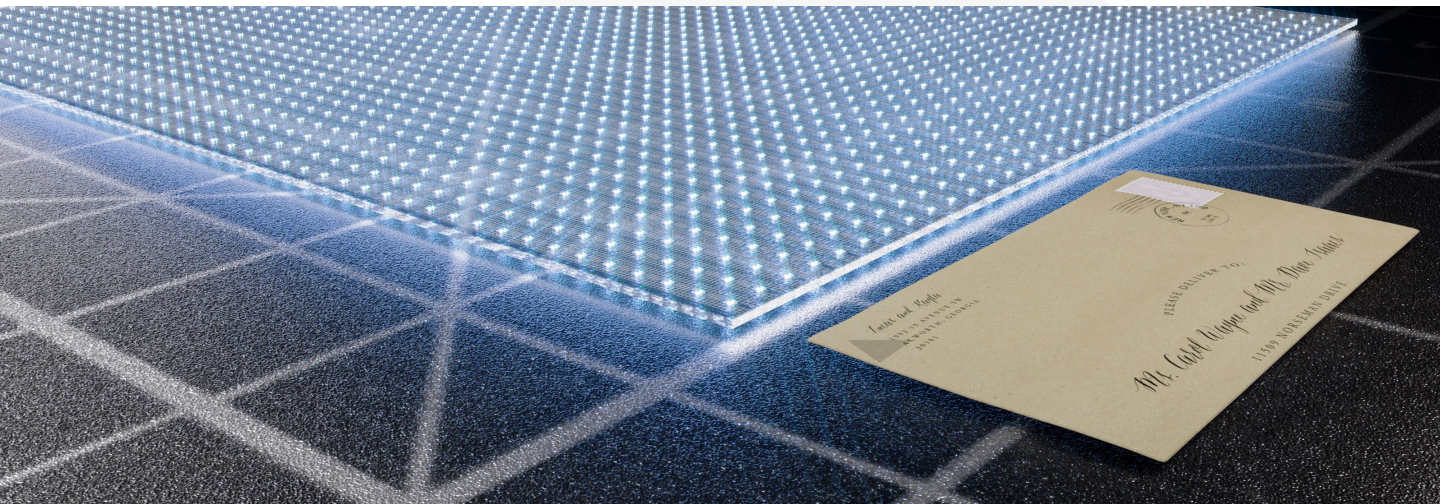


Independent Research and Development

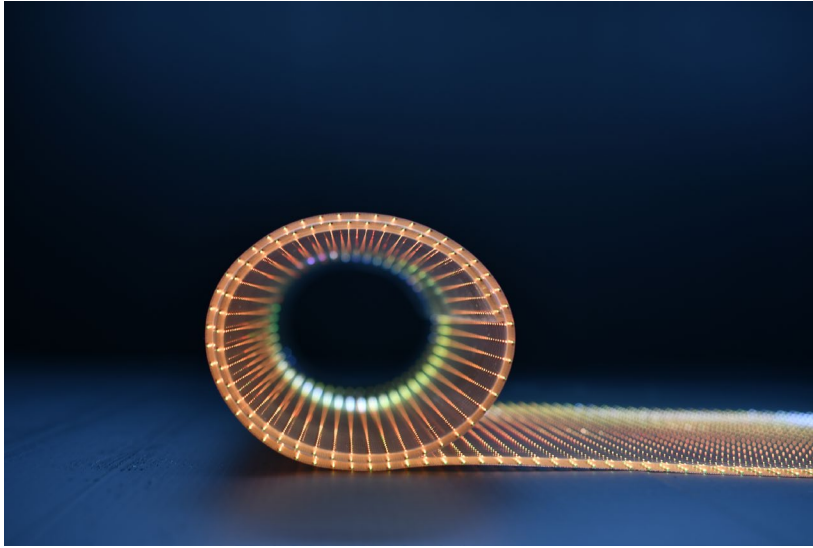

Colorful and Transparent

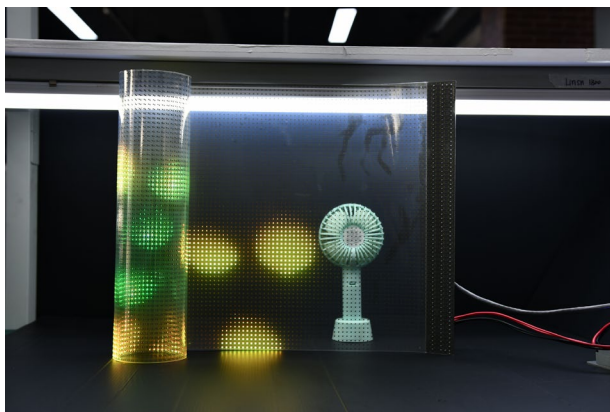

Extended Visuals

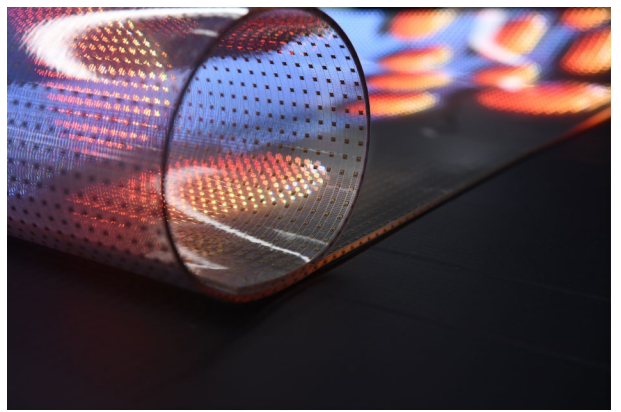



Technical Specifications

Model	P 6.25	P8	P10	P15	P20
Module Size (mm)	1000 x 400	1000 x 400	1000 x 400	990 x 390	1000 x 400
Pixel Composition	R1G1B1	R1G1B1	R1G1B1	R1G1B1	R1G1B1
Pixel Spacing (mm)	6.25 x 6.25	8 x 8	10 x 10	15 x 15	20 x 20
Module Pixel (dots)	6400	6250	4000	1716	1000
Pixel/m2 (dots)	25600	16500	10000	6625	2500
Brightness	3000 cd/m²	3000 cd/m²	3000 cd/m²	3000 cd/m²	3000 cd/m²
Permeability	90%	92%	94%	94%	95%
Viewing Angle	160°	160°	160°	160°	160°
Input Voltage	AC110-240V 50/ 60Hz	AC110-240V 50/ 60Hz	AC110-240V 50/ 60Hz	AC110-240V 50/ 60Hz	AC110-240V 50/ 60Hz
Maximum Power	600w/m²	400w/m²	400w/m²	400w/m²	400w/m²
Average Power	200w/m²	200w/m²	200w/m²	200w/m²	200w/m²
Operating Temperature Operating Humidity	-20°C~55°C 10-90% RH	-20°C~55°C 10-90% RH	-20°C~55°C 10-90% RH	-20°C~55°C 10-90% RH	-20°C~55°C 10-90% RH
Weight	1.3kg	1.3kg	1.3kg	1.3kg	1.3kg
Thickness	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm
Drive Mode	static state	static state	static state	static state	static state
Control System	Nova/ColorLight	Nova/ColorLight	Nova/ColorLight	Nova/ColorLight	Nova/ColorLight
Life-time	100000H	100000H	100000H	100000H	100000H
Grayscale level	16bit	16bit	16bit	16bit	16bit
Refresh rate	3840 Hz	3840 Hz	3840Hz	3840 Hz	3840 Hz